


## GB 21 AGY Agglomerate

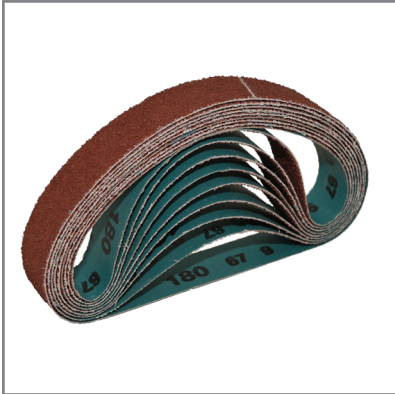

### Features:

Grain:	Aluminum oxide
Backing:	Y-cloth, waterproof
Bonding:	Artificial Resin
Coating:	Half open
Additions:	None
Grit Range:	<b>80, 120, 180, 240, 320, 400, 600</b> *
Appearance:	Neutral

\* ■ = in stock

■ = available within 3-5 weeks

### Benefits:

- Very high durability
- Long-term uniform grinding pattern
- Waterproof
- Neutral backing

### Applications:

- To be used for wet and dry grinding
- Comparatively higher contact pressure is required
- Select grit one to two levels finer than for conventional abrasives
- Grinding of sheet metal and coils made of steel and stainless steel
- Centerless grinding of steel and stainless steel pipes
- Turbine blade machining
- Overcasting weld seams in stainless steel processing

Application example:



For the right cutting speed for your application, please refer to the cutting speed information sheet.

### GeBrax GmbH

Obere Hommeswiese 41–45  
57258 Freudenberg  
Germany

Phone: +49 27 34 / 28 474-0  
Fax: +49 27 34 / 28 474-10

E-Mail: [info@gebrax.de](mailto:info@gebrax.de)  
[www.gebrax-abrasives.com](http://www.gebrax-abrasives.com)

Further information on request. Subject to technical changes.

### Materials:

