


## GB 21 AX

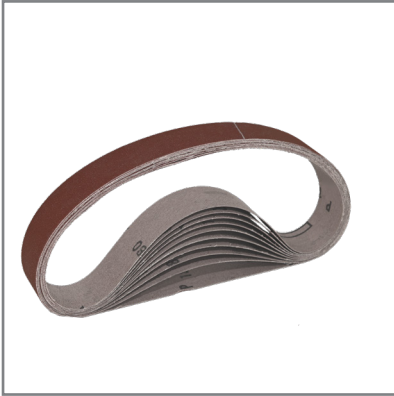

### Features:

Grain:	Aluminum oxide
Backing:	X-cloth
Bonding:	Artificial Resin
Coating:	Open
Additions:	None
Grit Range:	<b>40, 60, 80, 120, 180, 240, 320, 400 *</b>
Appearance:	Neutral

\* ■ = in stock

■ = available within 3-5 weeks

### Benefits:

- No clogging with lubricating coatings, adhesives and soft metals
- Good grain adhesion
- Sharp and aggressive cut
- High removal rate
- Neutral backing

### Applications:

- Ideal for grinding steel and stainless steel, cast, nickel alloys, non-ferrous metals, brass, titanium, wood and aluminum
- Suitable for deburring and fine grinding of strong shaped workpieces

For the right cutting speed for your application, please refer to the cutting speed information sheet.

Application example:



### GeBrax GmbH

Obere Hommeswiese 41-45  
57258 Freudenberg  
Germany

Phone: +49 27 34 / 28 474-0  
Fax: +49 27 34 / 28 474-10

E-Mail: [info@gebrax.de](mailto:info@gebrax.de)  
[www.gebrax-abrasives.com](http://www.gebrax-abrasives.com)

Further information on request. Subject to technical changes.

### Materials:

