


GB 51 CY

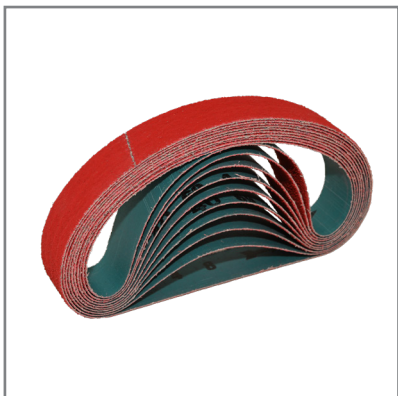

Features:

Grain:	Ceramic grain
Backing:	Y-cloth, waterproof
Bonding:	Artificial Resin
Coating:	Closed
Additions:	Top-Size coating
Grit Range:	24, 36, 40, 50, 60, 80, 120 *
Appearance:	Neutral

* ■ = in stock

■ = available within 3-5 weeks

Benefits:

- Very high stock removal rate
- Self-sharpening effect results
- High wear resistance
- High resilience
- Cool grinding processes
- Neutral backing

Applications:

- For hard metal surfaces such as unalloyed steel, stainless steel, cast iron and materials with superalloys
- For medium to high applications contact pressure

For the right cutting speed for your application, please refer to the cutting speed information sheet.

Application examples:



GeBrax GmbH

Obere Hommeswiese 41-45
57258 Freudenberg
Germany

Phone: +49 27 34 / 28 474-0
Fax: +49 27 34 / 28 474-10


E-Mail: info@gebrax.de
www.gebrax-abrasives.com

Further information on request. Subject to technical changes.

Materials:



Stainless steel



Alloys



Unalloyed steel