


R 270 Agglomerate

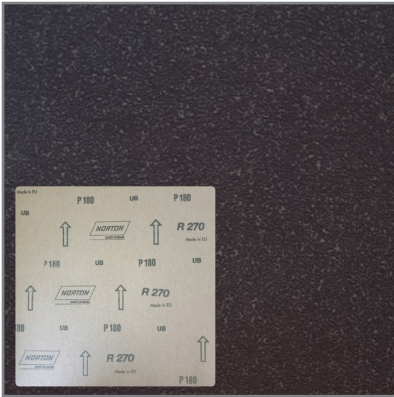

Features:

Grain:	Aluminum oxide
Backing:	Y-cloth, waterproof
Bonding:	Artificial Resin
Coating:	Closed
Additions:	None
Grit Range:	80, 120, 180, 240, 320, 400 *
Appearance:	Branded

* ■ = in stock

■ = available within 3-5 weeks

Benefits:

- Very high durability
- Long-term uniform grinding pattern
- Waterproof

Applications:

- To be used for wet and dry grinding
- Comparatively higher contact pressure is required
- Select grit one to two levels finer than for conventional abrasives
- Grinding of sheet metal and coils made of steel and stainless steel
- Centerless grinding of steel and stainless steel pipes
- Turbine blade machining
- Overcasting weld seams in stainless steel processing

For the right cutting speed for your application, please refer to the cutting speed information sheet.

GeBrax GmbH

Obere Hommeswiese 41-45
57258 Freudenberg
Germany

Phone: +49 27 34 / 28 474-0
Fax: +49 27 34 / 28 474-10

E-Mail: info@gebrax.de
www.gebrax-abrasives.com

Further information on request. Subject to technical changes.

Materials:

