


## Trizact™ velcro discs 3M 237 AA

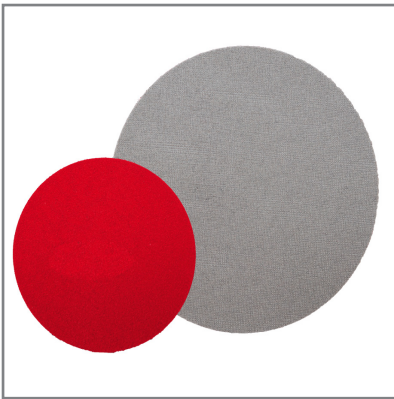

### Features:

Grain:	Aluminum oxide in 3D-structure
Mounting:	Velcro (red velour)
Grit Range:	A 160 (P 120), A 100 (P 220), A 65 (P 280), A 45 (P 400), A 30 (P 600), A 16 (P 1200)
Appearance:	Neutral

### Benefits:

- The pyramid structure allows to skip working steps and thus an extensive shortening of the work time


### Applications:

- For all materials, especially for titanium, nickel, cobalt, chrome and other stainless steel alloys
- For all grinding work up to rough polishing

∅	Mounting	max. rpm
115 mm	velcro backing	5.300
125 mm	velcro backing	4.850

For the right cutting speed for your application, please refer to the cutting speed information sheet.

Application examples:

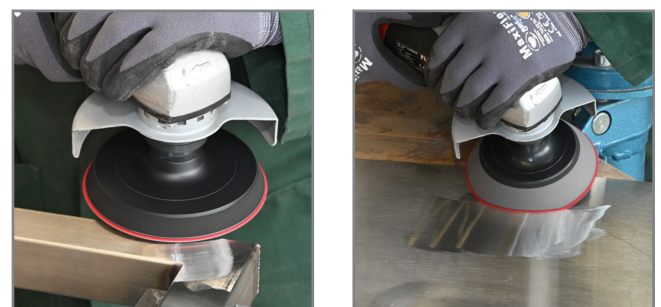

### GeBrax GmbH

Obere Hommeswiese 41–45  
57258 Freudenberg  
Germany

Phone: +49 27 34 / 28 474-0  
Fax: +49 27 34 / 28 474-10

E-Mail: [info@gebrax.de](mailto:info@gebrax.de)  
[www.gebrax-abrasives.com](http://www.gebrax-abrasives.com)

Further information on request. Subject to technical changes.

### Materials:

