


Trizact™ velcro strips 3M 237 AA

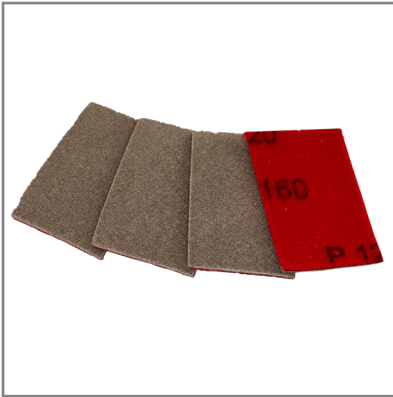

Features:

Grain:	Aluminum oxide in 3D-structure
Mounting:	Velcro (red velour)
Dimension:	39 x 60 mm
Grit Range:	A 160 (P 120), A 65 (P 280), A 45 (P 400), A 16 (P 1200)
Appearance:	Neutral

Benefits:

- The pyramid structure allows to skip working steps and thus an extensive shortening of the work time

Applications:

- For all materials, especially for titanium, nickel, cobalt, chrome and other stainless steel alloys
- For all grinding work up to rough polishing
- Suitable for hand grinding (dry and wet grinding) or for electric files with a lifting device
- For grinding and satin finishing of profiles, housing parts in metal and railing construction

Application examples:



For the right cutting speed for your application, please refer to the cutting speed information sheet.

GeBrax GmbH

Obere Hommeswiese 41–45
57258 Freudenberg
Germany

Phone: +49 27 34 / 28 474-0
Fax: +49 27 34 / 28 474-10

E-Mail: info@gebrax.de
www.gebrax-abrasives.com

Further information on request. Subject to technical changes.

Materials:

