

Flap roller GB 740



Features:

Grain:	Aluminum oxide
Intake:	19 mm bore with 4 keyways
Grit Range:	40, 50, 60, 80, 100, 120, 150, 180, 220, 240, 280, 320
Appearance:	Neutral

Benefits:

- The hole core made of plastic with a diameter of 19 mm fits all commercially available drive mandrels
- Optimal price / performance ratio


Applications:

- Suitable for larger areas (e.g. in the container and apparatus engineering)
- For removing rust, oxide layers, minor scratches
- For the stronger structuring and satin finishing of metals


Ø	Width	max. rpm
100	50	6.100
100	100	6.100

For the right cutting speed for your application, please refer to the cutting speed information sheet.

Application examples:

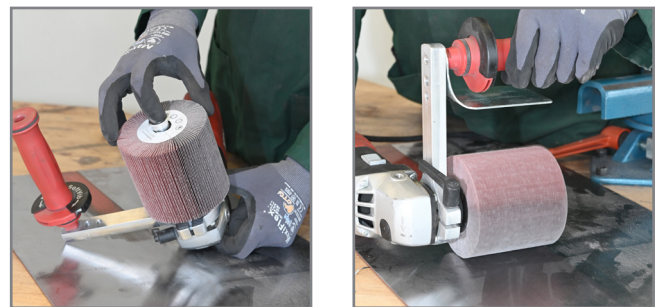

Materials:

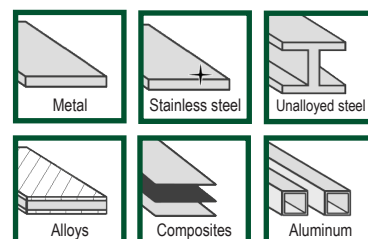

GeBrax GmbH

Obere Hommeswiese 41-45
57258 Freudenberg
Germany

Phone: +49 27 34 / 28 474-0
Fax: +49 27 34 / 28 474-10

E-Mail: info@gebrax.de
www.gebrax-abrasives.com

Further information on request. Subject to technical changes.