


## Fibre discs ceramic grain GB 51 CFS

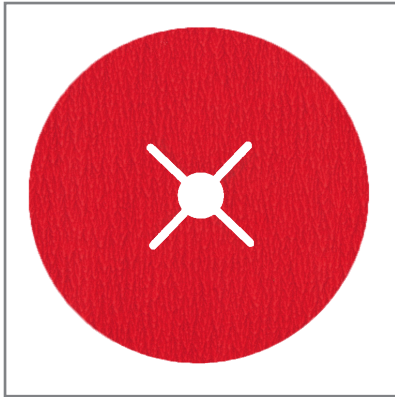

### Features:

Grain:	Ceramic grain
Intake:	22 mm, 4-way slot for backing pad
Grit Range:	24, 36, 40, 50, 60, 80, 120
Appearance:	Neutral

### Benefits:

- Very high removal rate
- Self-sharpening
- High wear resistance
- High resilience
- Cool cut


### Applications:

- For all materials, especially stainless steel, high-alloy steels, aluminum, heat-resistant steel, cast iron and non-ferrous metals

Ø	Bore	max. rpm
115 mm	22 mm, 4-way slot	13.000
125 mm	22 mm, 4-way slot	12.000

For the right cutting speed for your application, please refer to the cutting speed information sheet.


Application examples:



### Materials:



Stainless steel



Alloys



Unalloyed steel

### GeBrax GmbH

Obere Hommeswiese 41–45  
57258 Freudenberg  
Germany

Phone: +49 27 34 / 28 474-0  
Fax: +49 27 34 / 28 474-10

E-Mail: [info@gebrax.de](mailto:info@gebrax.de)  
[www.gebrax-abrasives.com](http://www.gebrax-abrasives.com)

Further information on request. Subject to technical changes.