

## Flap wheels GB 840



### Features:

Grain:	Aluminum oxide
Intake:	6 mm shaft
Grit Range:	40, 60, 80, 120, 150, 180, 220, 240, 320, 400
Appearance:	Neutral

### Benefits:

- Adapts to the workpiece contour
- Versatile use on stainless steel, steel and non-ferrous materials
- Wide grit range


Ø	Shaft	max. rpm
10	6 mm	76.300
15	6 mm	50.900
20	6 mm	38.100
25	6 mm	30.000
30	6 mm	25.500
40	6 mm	19.100
50	6 mm	15.300
60	6 mm	12.700
80	6 mm	9.600
100	6 mm	7.650

For the right cutting speed for your application, please refer to the cutting speed information sheet.


### Applications:

- For dry grinding
- Rough and fine grinding
- Grinding small areas or small, difficult accessible parts

Application examples:



### Materials:

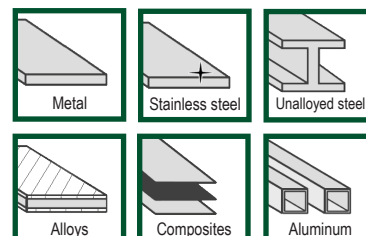

### GeBrax GmbH

Obere Hommeswiese 41–45  
57258 Freudenberg  
Germany

Phone: +49 27 34 / 28 474-0  
Fax: +49 27 34 / 28 474-10

E-Mail: [info@gebrax.de](mailto:info@gebrax.de)  
[www.gebrax-abrasives.com](http://www.gebrax-abrasives.com)

Further information on request. Subject to technical changes.