

Non-woven flap wheels GB 820



Features:

Grain:	Non-woven (orange, yellow): Aluminum oxide	Non-woven (green): Silicon Carbide
Intake:	6 mm shaft	
Grit Range:	orange = Coarse (P 80), yellow = Fine (P 180-240), green = Very Fine (P 280 -320)	
Appearance:	Neutral	

Benefits:

- Adapts to the workpiece contour
- Extremely durable due to double impregnation
- For achieving a matt finishing with hardly any transitions on stainless steel surfaces
- Easy assigning of the fineness structures due to color marking

Applications:

- For metal working and for the processing of stainless steels in apparatus, container, automotive and mold making as well as in the tool industry


Ø	Shaft	max. rpm
40	6 mm	19.100
50	6 mm	15.300
60	6 mm	12.700
80	6 mm	9.600

For the right cutting speed for your application, please refer to the cutting speed information sheet.

Application examples:



Materials:

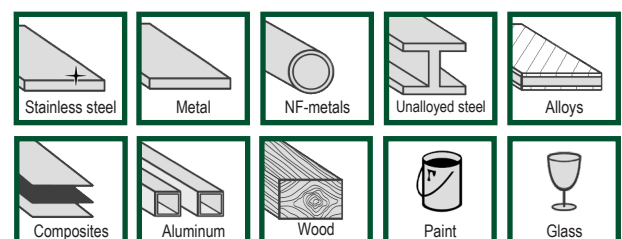

GeBrax GmbH

Obere Hommeswiese 41-45
57258 Freudenberg
Germany

Phone: +49 27 34 / 28 474-0
Fax: +49 27 34 / 28 474-10

E-Mail: info@gebrax.de
www.gebrax-abrasives.com

Further information on request. Subject to technical changes.