


3M™ 237 AA Trizact™

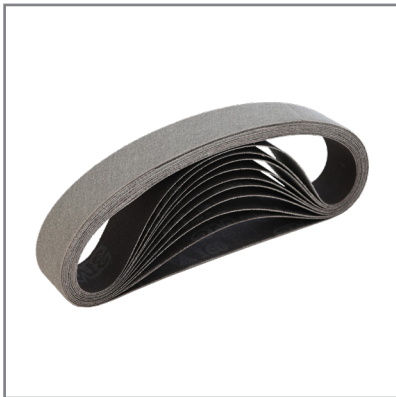

Features:

Grain:	Aluminum oxide
Backing:	X-cloth
Bonding:	Artificial Resin
Coating:	Microreplication
Additions:	Additives, 3D pyramid structure
Grit Range:	A160, A100, A80, A65, A45, A30, A16, A6 *
Appearance:	Branded

* ■ = in stock

■ = available within 3-5 weeks

Benefits:

- Strong stock removal
- Low grinding pressure required
- Consistent surface quality
- Reduction of grinding steps up to the fine grinding
- Long operation life
- Cool grinding
- Excellent surface

Applications:

- For hard metal surfaces like stainless steel, nickel, titanium, cobalt and chrome
- For the fine grinding of workpieces, like e.g. implants, dental or medical devices, golf clubs, turbine blades, sporting arms, cutlery, stainless steel pots saucepans and fittings

Application examples:



For the right cutting speed for your application, please refer to the cutting speed information sheet.

GeBrax GmbH

Obere Hommeswiese 41-45
57258 Freudenberg
Germany

Phone: +49 27 34 / 28 474-0
Fax: +49 27 34 / 28 474-10

E-Mail: info@gebrax.de
www.gebrax-abrasives.com

Further information on request. Subject to technical changes.

Materials:

