


GB 11 AY

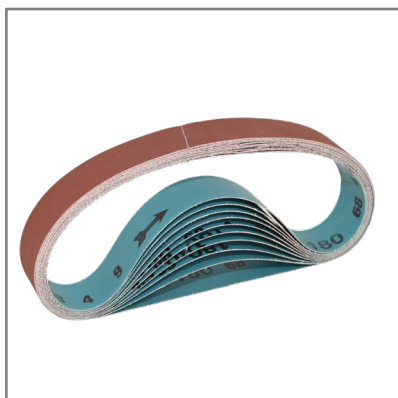

Features:

Grain:	Aluminum oxide
Backing:	Y-cloth, waterproof
Bonding:	Artificial Resin
Coating:	Closed
Additions:	None
Grit Range:	16, 36, 40, 60, 80 , 100, 120, 150, 180 , 220, 240 , 280, 320 *
Appearance:	Neutral

* ■ = in stock

■ = available within 3-5 weeks

Benefits:

- Good grain bonding
- High stock removal rate
- Heavy texture Y-cloth
- Neutral backing

Applications:

- To be used in wet and dry grinding
- Deburring forged and cast parts
- Grinding of stainless steel, steel, wood, rubber, plastic and leather

For the right cutting speed for your application, please refer to the cutting speed information sheet.

Application example:



GeBrax GmbH

Obere Hommeswiese 41-45
57258 Freudenberg
Germany

Phone: +49 27 34 / 28 474-0
Fax: +49 27 34 / 28 474-10

E-Mail: info@gebrax.de
www.gebrax-abrasives.com

Further information on request. Subject to technical changes.

Materials:

