


Unitized compact discs GB 676 T

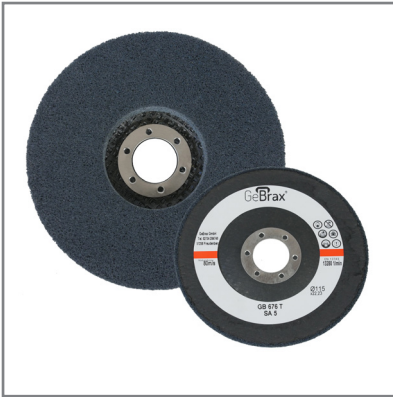

Features:

Grain:	Aluminum oxide
Intake:	Glass fabric backing disc with 22 mm bore
Grit Range:	H 5 (soft), H 6 (medium soft), H 7 (medium hard), H 8 (hard), H 10 (extra hard)
Appearance:	Neutral

Benefits:

- Long operation life
- Increased productivity
- Versatile application
- No clogging of the material
- Causes no faults
- Low edge wear

Applications:

- Multilayer pressed, three-dimensional non-woven discs, impregnated with active fillers inside the artificial resin. Thus, there's a broad product range, from very hard burring up to soft and flexible finishing works.


Ø	Intake	max. rpm
115 mm	22 mm	10.000
125 mm	22 mm	8.000

For the right cutting speed for your application, please refer to the cutting speed information sheet.

Application example:



Materials:

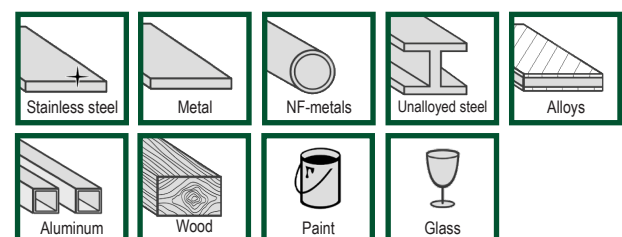

GeBrax GmbH

Obere Hommeswiese 41–45
57258 Freudenberg
Germany

Phone: +49 27 34 / 28 474-0
Fax: +49 27 34 / 28 474-10

E-Mail: info@gebrax.de
www.gebrax-abrasives.com

Further information on request. Subject to technical changes.