


Fibre discs 3M 982 C

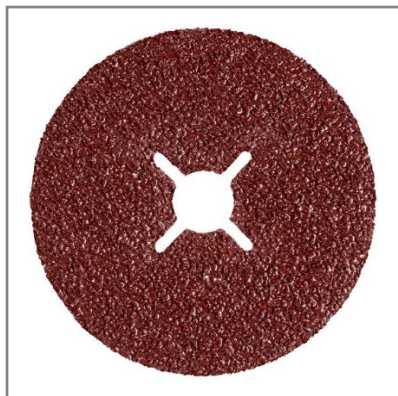

Features:

Grain:	Ceramic grain
Intake:	22 mm, 4-way slot for backing pad
Grit Range:	36, 60, 80
Appearance:	Branded

Benefits:

- Very good cutting performance and service life
- Requires less pressure and offers greater working comfort
- Processes the surface cleanly and evenly


Applications:

- Suitable for heavy use
- Removal and weld seam processing on steel


Ø	Bore	max. rpm
115 mm	22 mm, 4-way slot	13.000
125 mm	22 mm, 4-way slot	12.000

For the right cutting speed for your application, please refer to the cutting speed information sheet.

Application examples:

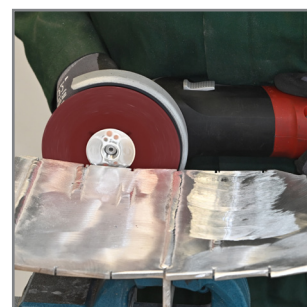

Materials:

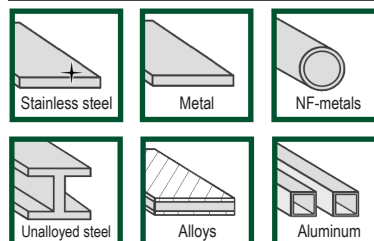

GeBrax GmbH

Obere Hommeswiese 41–45
57258 Freudenberg
Germany

Phone: +49 27 34 / 28 474-0
Fax: +49 27 34 / 28 474-10

E-Mail: info@gebrax.de
www.gebrax-abrasives.com

Further information on request. Subject to technical changes.