

Spiral belts GB 340



Features

Grain:	Aluminum oxide
Backing:	X-cloth, coiled design
Bonding:	Artificial Resin
Coating:	Closed
Additions:	None
Grit Range:	24, 36, 50, 60, 80, 100, 120, 150, 180, 220, 240, 280, 320, 400
Appearance:	Neutral

Benefits:

- Strong removal at low flexibility

Applications:

- Fine machining of die-cut parts, inner surfaces of cylinders, pipes and parts with bore-holes
- For machining of steel, stainless steel, non-ferrous metals, plastics, wood
- Application with rubber supports on electric and compressed air tools


Ø in mm	max. rpm
10	38.000
13	30.000
15	26.000
19	19.000
22	17.000
25	15.000
30	13.000
45	8.500
60	6.500
75	5.000
100	4.000

For the right cutting speed for your application, please refer to the cutting speed information sheet.

Application example:



Materials:

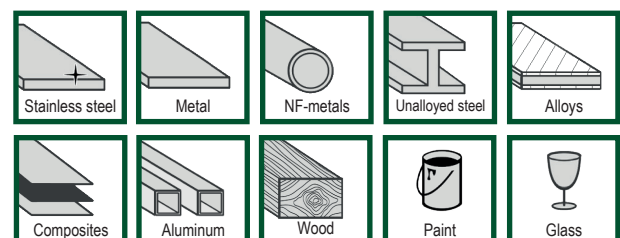

GeBrax GmbH

Obere Hommeswiese 41–45
57258 Freudenberg
Germany

Phone: +49 27 34 / 28 474-0
Fax: +49 27 34 / 28 474-10

E-Mail: info@gebrax.de
www.gebrax-abrasives.com

Further information on request. Subject to technical changes.